




BEARING DRIVESHAFT ANDERSON, INC.

INA PASE40-N Bearing units

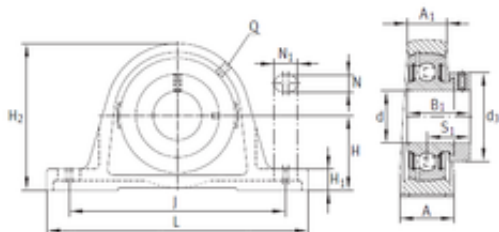

PASE40-N Bearing 2D drawings and 3D CAD models

Bearing No. PASE40-N

Bore Diameter	40 mm
d	40 mm
S1	32,8 mm
Thread (Q)	Rp1/8
d3	58 mm
A	48 mm
A1	30 mm
B1	43,8 mm
H	49,2 mm
H1	19 mm
H2	99 mm
J	138 mm
L	179 mm
N	14 mm
N1	26 mm
Weight	1,84 Kg
Basic dynamic load rating (C)	32,5 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	2.084
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



BEARING DRIVESHAFT ANDERSON, INC.

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GRAE40NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Spherical Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 40MM Bore; 49.2MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 125MM Minimum Bolt Spacing; 147MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Lip Contac
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	PASE40N
Weight / LBS	4.631
Bore	1.575 Inch 40 Millimeter
Length Thru Bore	1.72 Inch 43.7 Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter
Bolt Spacing Maximum	5.787 Inch 147Millimeter
Nominal Bolt Center to Center	5.4 Inch 136 Millimeter
Bolt Spacing Minimum	4.921 Inch 125Millimeter



BEARING DRIVESHAFT ANDERSON, INC.

Base to Center Height	1.937 Inch 49.2 Millimeter
-----------------------	------------------------------