




BEARING DRIVESHAFT ANDERSON, INC.

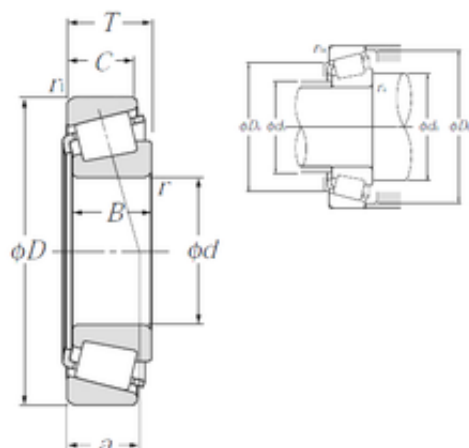

46,038 mm x 95,25 mm x 29,9 mm NTN
4T-436/432 Tapered roller bearings

Bearing No. 4T-436/432

4T-436/432 Bearing 2D drawings and 3D CAD models

Size	46.038x95.25x27.783 mm
Bore Diameter	46,038 mm
Outer Diameter	95,25 mm
Width	27,783 mm
d	46,038 mm
D	95,25 mm
T	27,783 mm
B	29,9 mm
C	22,225 mm
ra1 max.	2,3 mm
a	9,2 mm
Da	83 mm
db	52 mm
ra max.	3,5 mm
da	59 mm
Db	87 mm
Weight	0,927 Kg
Basic dynamic load rating (C)	108 kN
Basic static load rating (C0)	129 kN
(Grease) Lubrication Speed	4 200 r/min
(Oil) Lubrication Speed	5 600 r/min
Calculation factor (e)	0,28
Calculation factor (Y0)	1,16
d1	65 mm
e	0.28



BEARING DRIVESHAFT ANDERSON, INC.

Y2	2.11
Y0	1.16
Mass	0.93 kg
Dynamic load, C	108 kN
Rating life coefficient, A2	1.4
Static load, C0	129 kN
Fatigue limit load, Cu	15.7 kN
Nlim (oil)	5,600 rpm
Nlim (grease)	4,200 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.59 Hz
Characteristic outer ring frequency, BPF0	6.64 Hz
Characteristic inner ring frequency, BPF1	9.36 Hz
ra max	3.5 mm
r1a max	2.3 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.918
Product Group	B04334