




BEARING DRIVESHAFT ANDERSON, INC.

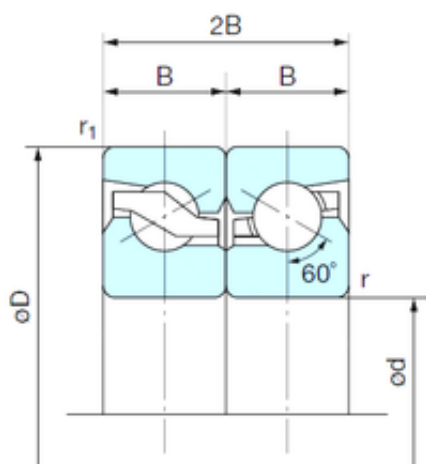

40 mm x 72 mm x 15 mm NACHI 40TAB07DB
Thrust ball bearings

Bearing No. 40TAB07DB

40TAB07DB Bearing 2D drawings and 3D CAD models

Size	40x72x15 mm
Bore Diameter	40 mm
Outer Diameter	72 mm
Width	15 mm
d	40 mm
D	72 mm
B	15 mm
C	15 mm
Angle (°)	60 °
r min.	1 mm
r1 min.	0.6 mm
2B	30 mm
Weight	0.26 Kg
Basic dynamic load rating (C)	32,5 kN
Basic static load rating (C0)	54,3 kN
Bore Type	Cylindrical Bore
Enclosure	Open
Configuration	Double Row
Bore Size	40 mm
Outside Diameter	72 mm
Width	15 mm
Fillet Radius/Chamfer	1 mm
r1	0.6 mm
Starting Torque - Grease Lubrication	25 N · cm



BEARING DRIVESHAFT ANDERSON, INC.

Dynamic Load Rating	32,500 N
Static Load Rating	54,300 N
Limiting Speed - Grease	3,750 rpm
Limiting Speed - Oil	5,000 rpm
da1 (min)	56.2 mm
da2 (min)	49.7 mm
Da1 (max)	56 mm
Da2 (max)	63.4 mm