




# BEARING DRIVESHAFT ANDERSON, INC.

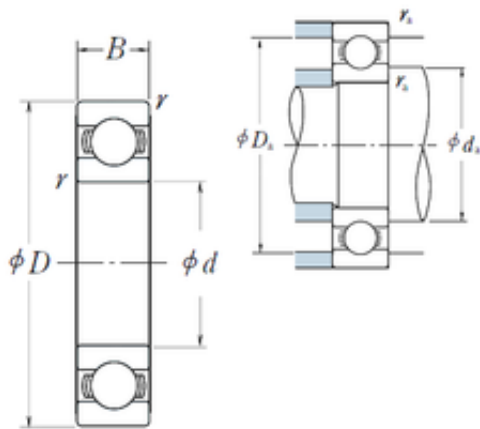

160 mm x 220 mm x 28 mm NSK 6932 Deep groove ball bearings

Bearing No. 6932

6932 Bearing 2D drawings and 3D CAD models

Size	160x220x28 mm
Bore Diameter	160 mm
Outer Diameter	220 mm
Width	28 mm
d	160 mm
D	220 mm
B	28 mm
C	28 mm
r min.	2 mm
da min.	169 mm
da max	176 mm
Da max.	211 mm
ra max.	2 mm
Weight	2,71 Kg
Basic dynamic load rating (C)	87 kN
Basic static load rating (C0)	96 kN
(Grease) Lubrication Speed	2 600 r/min
(Oil) Lubrication Speed	3 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NSK
Minimum Buy Quantity	N/A
Weight / Kilogram	2.8
EAN	0029176414756
Product Group	B00308



## BEARING DRIVESHAFT ANDERSON, INC.

Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	160MM Bore; 220MM Outside Diameter; 28MM Outer Race Width; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.nskamericas.com">http://www.nskamericas.com</a>
Weight / LBS	2.71
Outer Race Width	1.102 Inch   28 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outside Diameter	8.661 Inch   220 Millimeter
Bore	6.299 Inch   160 Millimeter
SRI	9.04
hidYobi	6932
LangID	1



## BEARING DRIVESHAFT ANDERSON, INC.

D_	220
SREX	0.03
B_	28
da min	169
hidTable	ecat_NSRDGB
Oil rpm	3000
SRE	9.04
mass	2.71
GRS rpm	2600
ra	2
SRIX	0.03
D_a	211
SRIN	-0.03
C0	96
fo	16.6
SREN	-0.03
DE_	207.462
Prod_Type3	DGBB_SR_OT
DA_	17.462
bomp	0
Z_	19
yobi	6932
C_conv	87000
ALPHA_	0
SDM_	190
r	2
KBRG	6101
SBRG	19
DI_	172.538