




BEARING DRIVESHAFT ANDERSON, INC.

SKF FBSA 204/QBC Thrust ball bearings

Bearing No. FBSA 204/QBC

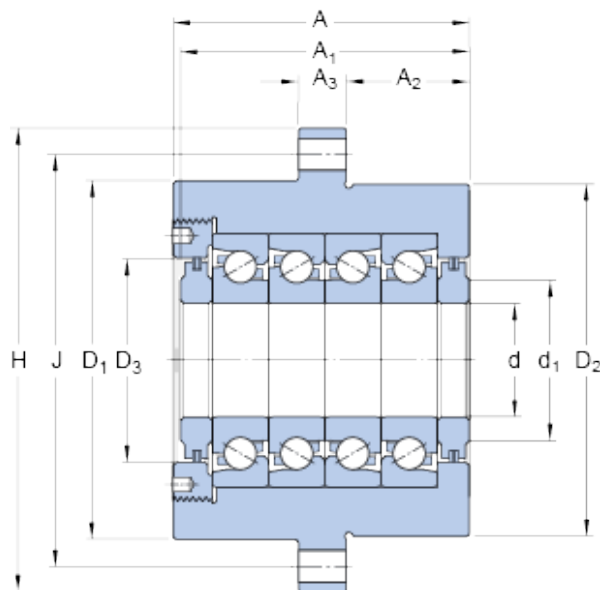

FBSA 204/QBC Bearing 2D drawings and 3D CAD models

Size	20x90x77 mm
Bore Diameter	20 mm
Outer Diameter	90 mm
Width	77 mm
d	20 mm
H	90 mm
A	77 mm
A ₁	74.26 mm
A ₂	32 mm
A ₃	13 mm
d ₁	26 mm
D ₁	64 mm
D ₂	60 mm
D ₃	36 mm
Basic dynamic load rating - C	35.9 kN
Basic static load rating - C ₀	98 kN
Fatigue load limit - P _u	3.6 kN
Limiting speed, Preload class A	4750 r/min
Limiting speed for oil lubrication	2375 mm/min
Preload class A	2960 N
Preload class B	5920 N
Frictional moment, Preload class A	0.1 N · m



BEARING DRIVESHAFT ANDERSON, INC.

Frictional moment, Preload class B	0.182 N · m
Static Axial rigidity, Preload class A	1360 N/micron
Static Axial rigidity, Preload class B	1720 N/micron
A ₁	74.26 mm
A ₂	32 mm
A ₃	13 mm
d ₁	26 mm
D ₁	64 mm
D ₂	60 mm
D ₃	36 mm
Basic dynamic load rating C	35.9 kN
Basic static load rating C ₀	98 kN
Fatigue load limit P _u	3.6 kN
Attainable speed for preload class A	4750 r/min
Attainable speed for preload class B	2375 r/min
Frictional moment for preload class A	0.1 N · m
Frictional moment for preload class B	0.182 N · m
Static axial stiffnes for preload class A	1360 N/ μ m
Static axial stiffnes for preload class B	1720 N/ μ m
Mass cartridge unit	1.7 kg
Through hole diameter for attachment bolts N	6.6 mm
Pitch diameter of attachment bolt holes J	76 mm
Cartridge half diameter without flange J ₁	32 mm